

ParaTube[®] Double Tube Tubular Heat Exchangers - Disassemblable Design

FOR SANITARY APPLICATIONS

Double tube heat exchangers consist of two concentrically positioned tubes.

In this disassemblable design, there are o-rings on both sides and the inner tube can be removed from the outer tube.

This design is suitable for heating, cooling, pasteurising and Ultra High Temperature (UHT) processing of a large range of products (dairy, juices, sauces, beverages, processed food, etc.) from low to medium viscosities depending on application.


Double tube heat exchangers are the best option for products with low to medium viscosities containing particles. Particles increase turbulence in the inner tube, improving heat transfer.

The construction of the double tube design allows for a wide range of inner tube outer diameters making it capable of processing small to medium flow rates.



MAIN FEATURES

- Thermal expansion devices are not required. This double tube design has free expansion.
- Product side is suitable for inspection by removing bends between modules.
- Flexible arrangement - modules are connected on product side using bends and on service side by orthogonal connections.
- Inner tube can be removed from outer tube.

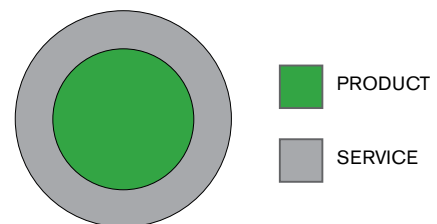

STANDARD MATERIALS

AISI 316 (1.4401) /316L (1.4404)

Others available on request

STANDARD FINISH

PRODUCT SIDE: 2B finish/polished

SERVICE SIDE: Grinded

WORKING CONDITIONS

DESIGN TEMPERATURE: up to 170°C (338°F)

DESIGN PRESSURE:

PRODUCT SIDE: 30 bar (435 psi)

SERVICE SIDE: 12 bar (174 psi)

CONNECTIONS

PRODUCT SIDE

Clamp fittings are supplied as standard.

SERVICE SIDE

Clamp fittings are supplied as standard

Other options are available on some models on request.

NOMENCLATURE

SDT-1-2-LM – **S**tandard **D**ouble **T**ube Type Disassemblable Design

1: Outer tube outer diameter (mm)

2: Inner tube outer diameter (mm)

L: Tubes length (m)

PRODUCT RANGE

OUTER TUBE outer diameters

From 57mm (2 in) to 154mm (6 in)

INNER TUBES outer diameters

From 25mm (1 in) to 104mm (4 in)

TUBES LENGTH

Standard supply: 3 m - 6 m (10 ft - 20 ft) - Other lengths available on request.

CORRUGATION

All models can be supplied with corrugated or smooth tubes.

CERTIFICATIONS

In compliance with European Pressure Equipment Directive 2014/68/EU.

OTHER CERTIFICATES available on request.

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPXFLOW

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction, dimensional data and certifications as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region.

For more information visit www.spxflow.com.

The green "s" and "x" are trademarks of SPX FLOW, Inc.

APV_HE-Doubletube-SDT_FLR_GB

Version 04/2020

Identification Number: APV-1235-GB

SPX FLOW No.666 FengJin Road, XiDu Industrial Park
Feng Xian District, Shanghai, 201401 PR China
P: +86 21 6715 8181

SPX FLOW ul. Stanisława Jana Rolbieskiego 2
85-862 Bydgoszcz Poland
P: +48 52 566 76 00

E: leads@spxflowleads.com

COPYRIGHT © 2020 SPX FLOW, Inc.