

WAUKESHA Series 200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
% = Efficiency Percentage



CAPACITY CURVES

Based on water at 70°F. (22°C.)

MODEL: 2045

50 Hz 1450 RPM

SIZE: 2 x 1-1/2 x 4-1/2

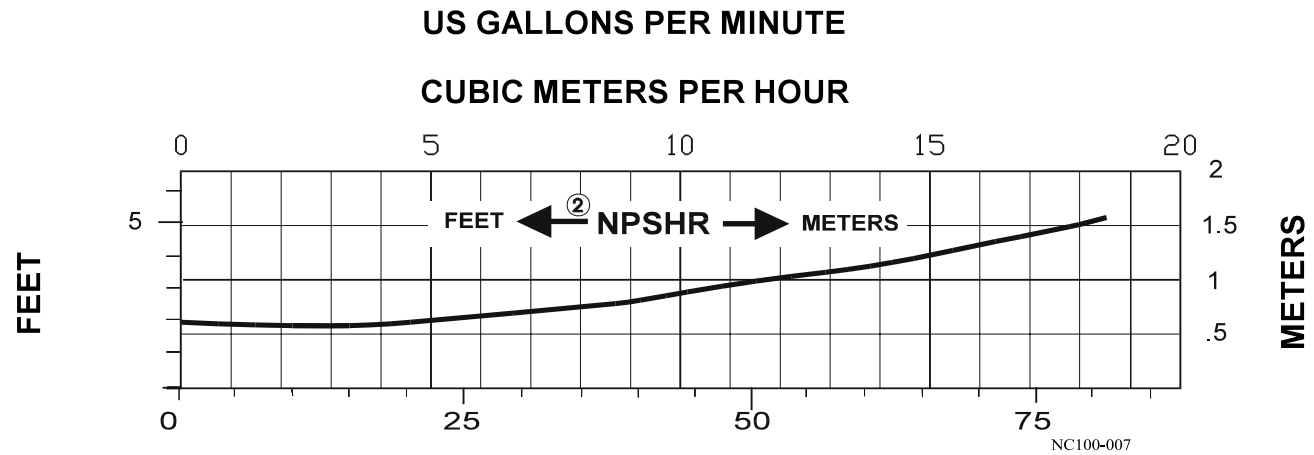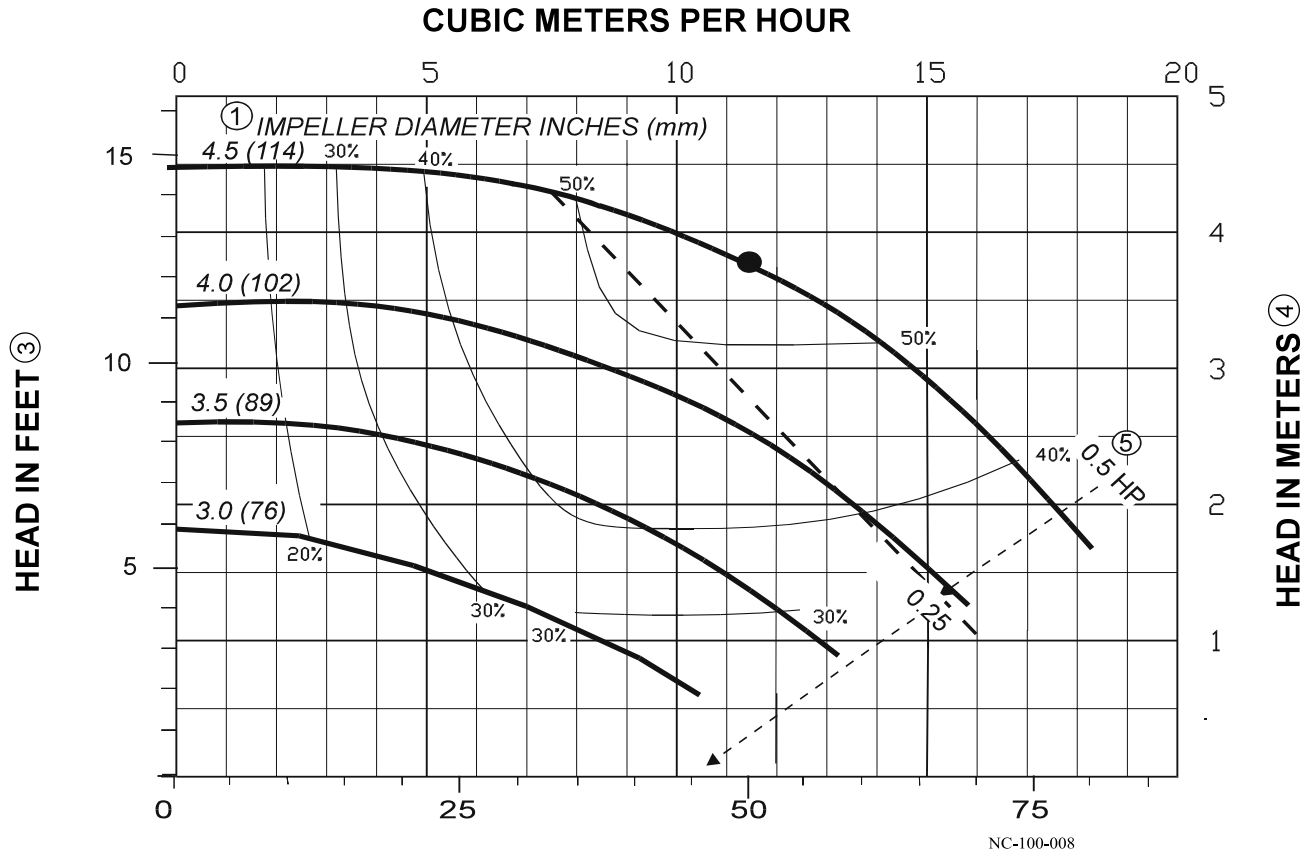

NOTES

- ① Impeller diameters available in 1/16-inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ $PSI = \frac{Head\ in\ Feet \times Specific\ Gravity}{2.31}$
- ④ $Kg/cm^2 = \frac{Head\ in\ Meters \times Specific\ Gravity}{10}$
- ⑤ $HP \times 0.746 = Kw$



Waukesha
Cherry-Burrell

611 Sugar Creek Road
Phone: 262-728-1900
www.spxflow.com/wcb

Delavan, WI 53115
Fax 262-728-4904

CURVE NUMBER
95-07045

EFFECTIVE DATE
5-28-2002

PAGE NUMBER
045