


# Capacity / WHP / VHP / NIPR

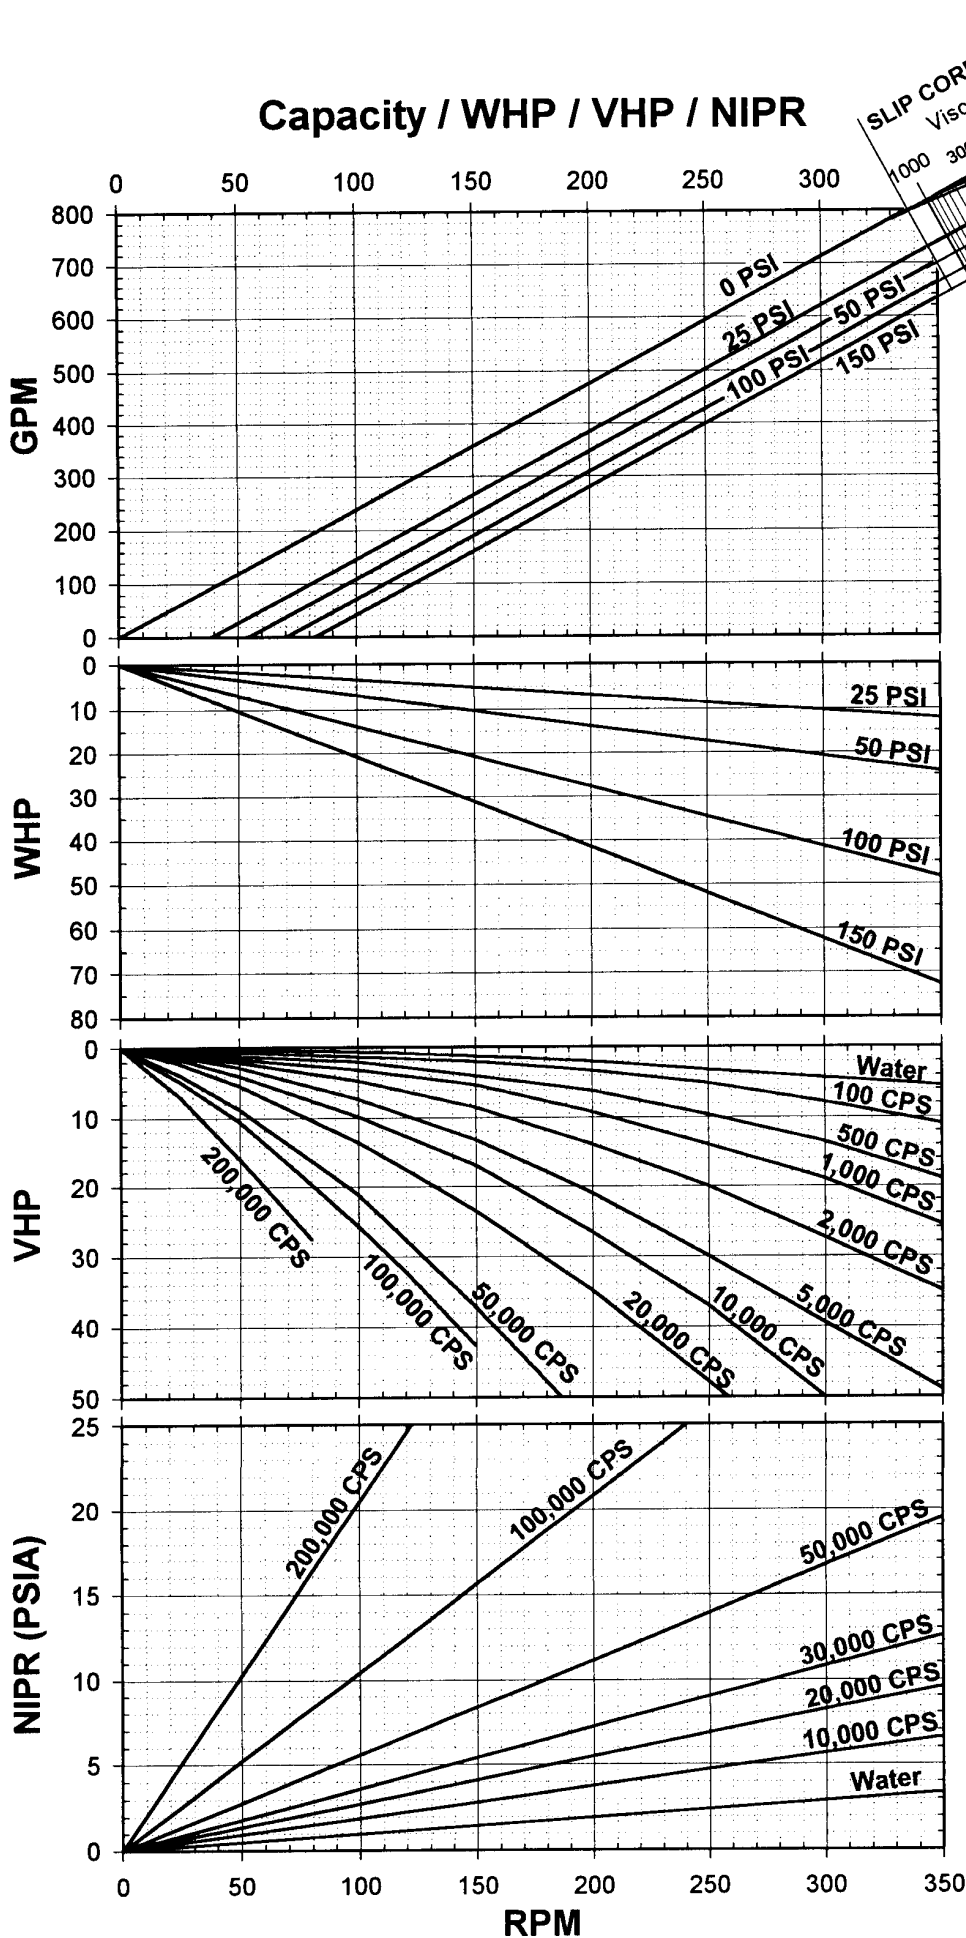

**Universal  
High Capacity  
Model**

## 520-UHC 523-UHC

Alloy 88 Rotors  
Standard Clearance  
Standard Port Size = 8.0"  
Displacement =  
2.375 Gal/Rev

**BHP = WHP + VHP**



611 Sugar Creek Road  
Delavan, WI 53115 USA  
Tel: 1-800-252-5200 or 262-728-1900  
Fax: 1-800-252-5012 or 262-728-4904  
E-mail: [custserv@gowcb.com](mailto:custserv@gowcb.com)  
Web Site: [www.gowcb.com](http://www.gowcb.com)

Effective Date: 5-02  
Specifications subject  
to change without notice

Curve Number  
**95-07087**