


Capacity / WHP / VHP / NIPR

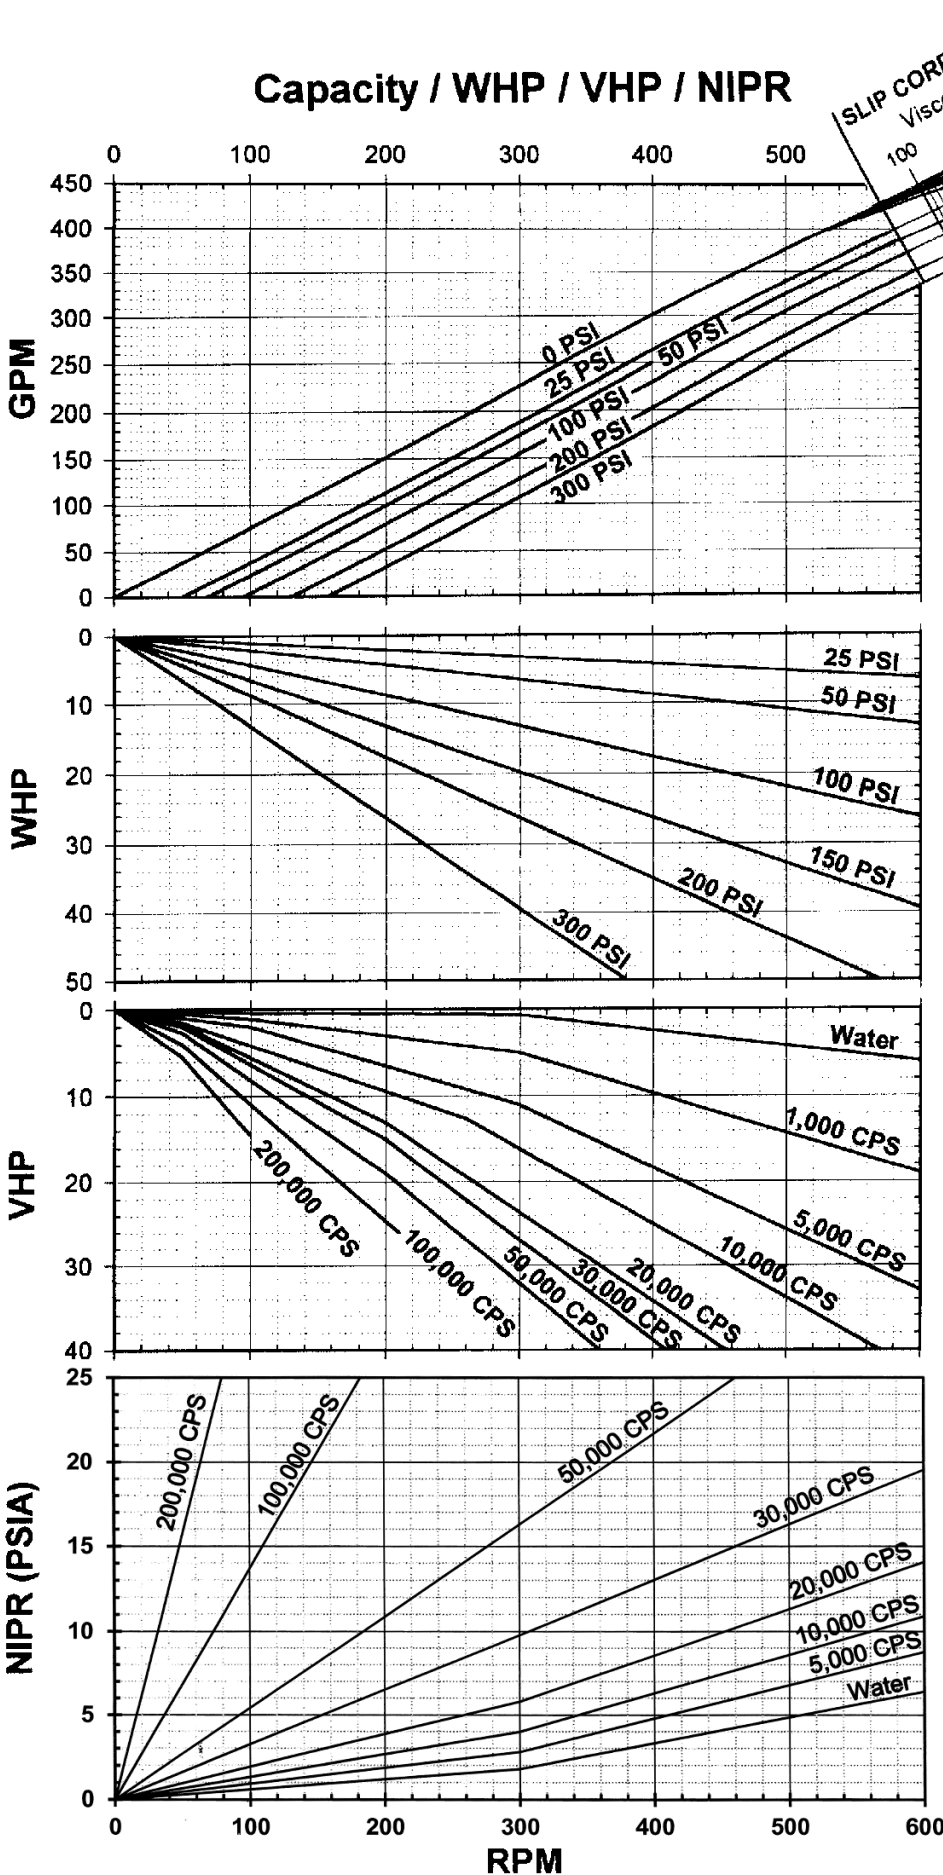

Universal 2 Sanitary Pumps Model

320-U2

Alloy 88 Rotors
Standard Clearance
Standard Port Size: 6.0"
Displacement:

0.752 gal/rev

BHP = WHP + VHP

SPXFLOW

Waukesha
Cherry-Burrell

611 Sugar Creek Road
Delavan, WI 53115 USA
T: 1-800-252-5200 / 262-728-1900
F: 1-800-252-5012 / 262-728-4904
E: wcb@spxflow.com
www.spxflow.com

Effective date: 12/15/1999

Specifications subject to change
without notice.

Curve Number
95-07132