

Anhydro MasterSpray 2500

Small Scale

The small scale spray drying plant, Anhydro MasterSpray 2500, is designed for drying of products in small scale production, R&D departments, universities and public institutions worldwide. This dryer is designed with specific focus on flexibility in the design and configuration, safety during operation, process control, ease of cleaning/sanitary design and scalability.

Anhydro MasterSpray 2500 is used worldwide by customers in the food, dairy, chemical and pharmaceutical industries.

The design of the Anhydro MasterSpray 2500 is based on a unique modular concept consisting of a basic plant and a large number of optional items, which enables customers to customize each plant to match their exact requirements.

Included Equipment for a Basic Plant

- Feed pump
- Feed tank
- Water tank
- Feed pipe
- Two-fluid nozzle atomizer, co-current
- Air intake filter
- Steam heater for main air and hot air duct
- Drying chamber with rupture disc for explosion protection
- Cyclone with powder container
- Fans and ducts
- Control panel with PLC incl. color touch screen
- Support structure

Optional Equipment for a Basic Plant

- Two-fluid nozzle atomizer, counter-current
- Centrifugal atomizer




- High pressure nozzle atomizer system
- Additional powder container
- Direct or indirect gas fired heater
- Electrical booster heater combined with steam heater
- Vent duct
- Indoor explosion venting system
- Explosion suppression system
- Pneumatic hammers
- Two point discharge
- Rotary valve
- Hepa filters
- Bag filter
- Air broom
- Powder cooling and conveying system
- Wet scrubber
- CIP system
- Simple integrated cleaning system (ICS)
- GMP documentation (IQ, OQ)
- GMP execution
- Noise attenuation
- Data-logging

ANHYDRO MASTERSPRAY 2500	
MAX. INLET AIR TEMP. WITH STEAM HEATER	392°F [200°C]
MAX. INLET AIR TEMP. WITH INDIRECT GAS HEATER	617°F [325°C]
MAX. INLET AIR TEMP. WITH DIRECT GAS HEATER	1,022°F [550°C]
MAX. WATER EVAPORATION (OUTLET TEMP. 70°C)	1,020 LB/H [463 KG/H]
MAX. DRYING AIR RATE	5,512 LB/H [2,500 KG/H]
DRYING CHAMBER DIAMETER	106 IN [2,700 MM]
POWER SUPPLY, STANDARD, AT 60 Hz	3x460 V
SUCTION FAN	15 HP [11 kW]
MAIN AIR HEATER	STEAM
FEED PUMP	1 HP [0.75 kW]


ANHYDRO MASTERSPRAY 2500	
COMPRESSED AIR CONSUMPTION AT 20 TO 70 PSI [1.4 TO 4.9 BAR] (G)	2.8-8.8 CMF [80-250 L/MIN]
PRESSURE SHOCK RESISTANCE	14.5 PSI [1 BAR]
MAX. KST. VALUE (WITH RUPTURE DISC)	200 BARxMxS ⁻¹
NOISE EMISSION*	85 dB (A)
PRODUCT CONTACTING PARTS	AISI 316
EXTERNAL SURFACES	AISI 304
FLOOR SPACE LxW	16.4x20 FT [5,000x6,000 MM]
HEIGHT	24.6 FT [7,500 MM]
TOTAL FREE HEIGHT	26.5 FT [8,100 MM]

* Approximately.

The MasterSpray 2500 plant complies with regulations and standards according to CE and ATEX.

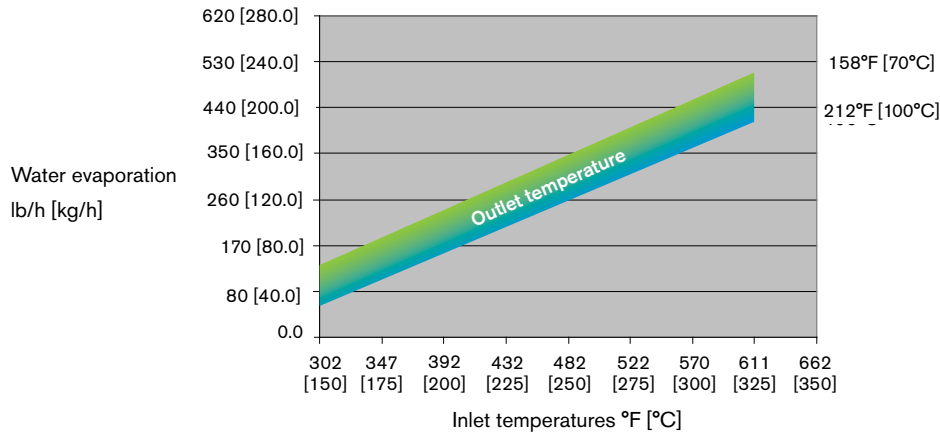

Process flow

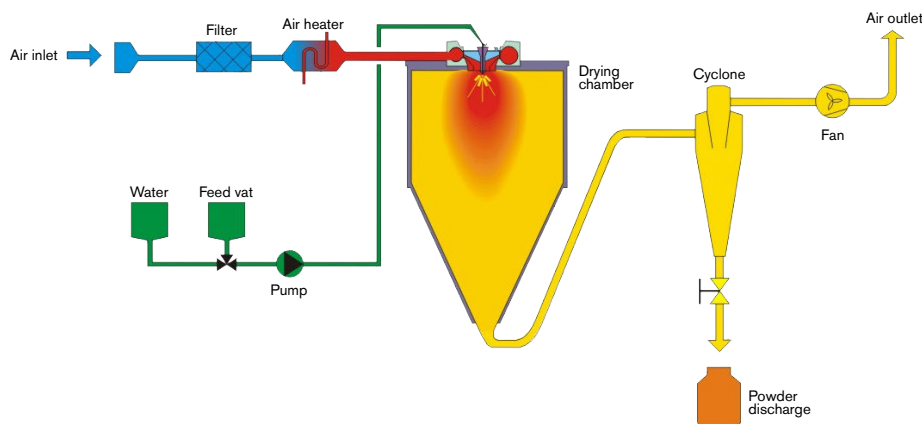

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPXFLOW

SPX FLOW 105 CrossPoint Pkwy, Getzville, NY 14068
P: +1 (716)-692-3000 E: leads@spxflowleads.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction, dimensional data and certifications as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "s" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 05/2019 ANH-112-US COPYRIGHT © 2019 SPX FLOW, Inc.