

## Clean Edge Impeller

DESIGNED FOR MUNICIPAL WASTE TREATMENT APPLICATIONS

The Lightnin Clean Edge Impeller fills the need for use in services where a ragless impeller is either specified or required. Specifically designed for this demanding service, the Clean Edge remains free of fibrous debris while delivering blending performance equal to a hydrofoil impeller.

Wastewater applications have stringy, solids called “rags” by industry personnel. This fibrous material causes equipment to foul, maintenance costs to increase due to added downtime through plant shutdowns, and mechanical damage. The fouling potential of these rags causes mixing impellers to lose their efficiency, vibrate, overload, and eventually break.


The Clean Edge impeller does not foul. It prevents rag accumulation and keeps the mixer operating smoothly at design power and without harmful vibration or tripping out due to overload.

- Patented impeller achieves steady and stable operation in harsh operating conditions.
- Clean Edge exhibits the same blending efficiency as a hydrofoil impeller and can often be a drop-in replacement for your existing mixers.
- Installation of a Clean Edge impeller will increase plant uptime, reduce maintenance, and eliminate failures related to rag buildup.
- The power and flow characteristics of the Clean Edge impeller make it the ideal retrofit for any underperforming system.
- Reduces the need for tank entry and the potential for on the job accidents.



## Clean Edge in Action

Have you ever seen Municipal Waste Treatment applications where the severe service causes premature failure and excessive maintenance?

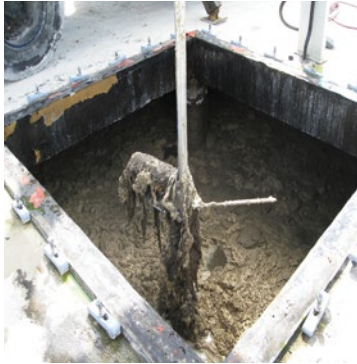

Pictured to the left is an Anoxic Mixer at a WWTP in Florida. The hydrofoil impellers installed here bind up with rags and other fibrous materials until the blades, shaft or mixer drive require maintenance and/or replacement.

Lightnin introduces a solution to this "dirty problem" in Municipal and Industrial treatment services.



The Clean Edge impeller pictured left remains free of fibrous debris while delivering performance equal to a hydrofoil impeller.

## Service & Support

- Equipment Services
- PM/PDM Services
- Additional Services
  - Installation and Startup
  - Maintenance and Repair
  - Asset Management

For 24-hour response, call 1-888-MIX-BEST (U.S. and Canada).

## Call the Experts

For more information about the Lightnin Clean Edge Impeller or to discuss your application, contact your local SPX FLOW Sales Representative at:

<http://www.spxflow.com/en/lightnin/where-to-buy/> or visit our website at [www.spxflow.com](http://www.spxflow.com).

Or call 1-888-MIX-BEST (U.S. and Canada).

## SPX FLOW, Inc. - Global locations

### USA

13320 Ballantyne Corporate Place  
Charlotte, NC 28277  
United States of America  
+1 704 752 4400

### CHINA

2F, Treasury Centre  
No. 1568 Huashan Road  
Shanghai 200052, China  
P: +86 (21) 22085889

### UK

Ocean House,  
Towers Business Park  
Didsbury, Manchester  
M20 2LY, UK  
P: +44 161 249 1170

For other Sales locations, click  
[www.spxflow.com/lightnin/contacts/where-to-buy/](http://www.spxflow.com/lightnin/contacts/where-to-buy/)  
or use your SmartPhone and the QR Code.



# SPXFLOW

**SPX FLOW, LLC - LIGHTNIN & PLENTY MIXERS**

135 Mt. Read Blvd., Rochester, NY 14611  
P: (888) 649-2378 (MIX-BEST), (US and Canada) or +1 (585) 436-5550  
E: [lightnin@spxflow.com](mailto:lightnin@spxflow.com) ▪ [www.spxflow.com/lightnin](http://www.spxflow.com/lightnin)

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit [www.spxflow.com](http://www.spxflow.com). The green "X" and "X" are trademarks of SPX FLOW, Inc.